

Drying and rewetting periods trigger high pulses of greenhouse gases in mesocosms from Tres Rios permanently-flooded constructed treatment wetland



Jorge Ramos¹ and Daniel L. Childers²

¹Environmental Life Sciences, School of Life Sciences, ²School of Sustainability, Arizona State University, Tempe, AZ, USA

Introduction

- The concept of wastewater treatment by wetland ecosystems developed from the fact that wetlands include both aerobic and anaerobic environments, which in combination enhances N removal through several biogeochemical processes.
- However, permanently-flooded constructed wetlands may generate appropriate conditions for the production and emission of greenhouse gases such as methane (CH₄) and nitrous oxide (N₂O).
- We aimed to investigate the effect of different hydrological regimes on CH₄ and N₂O fluxes in wetland soil core mesocosms from a permanently-flooded constructed wetland (Fig 1).

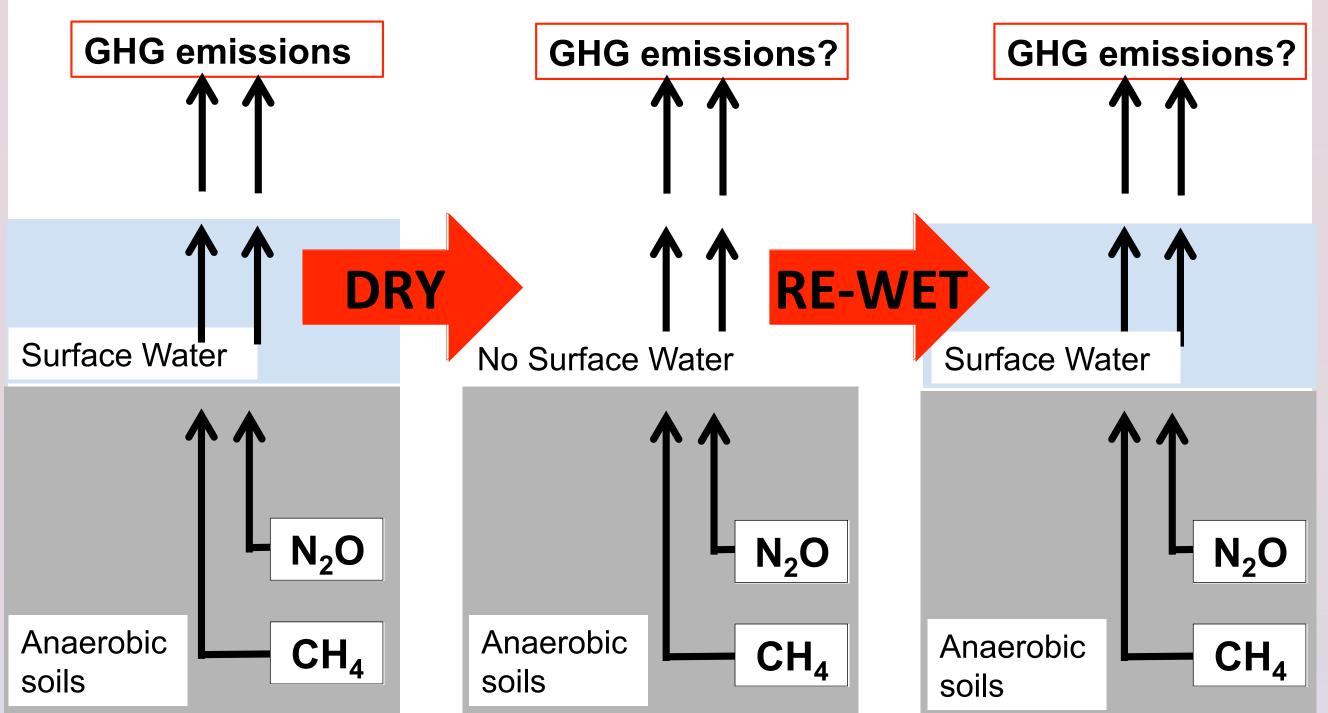


Figure 1. Representation of the application of the dry and re-wetting hydrological regimes to permanently-flooded wetland soils and the GHG emissions we investigated.

Materials, Methods and Experimental Design

- Soil cores were collected from the permanently-flooded Tres Rios Constructed Wetland, located approx. 20 km east of Phoenix, AZ.
- Soils consist of clay loam and sandy loam soils.
- From June 19 July 17, 2015, we constructed an experiment inside a greenhouse that included 24 mesocosms. These were exposed to a control and 3 flooding regimes: 2, 7, and 14 day-dry periods before re-wetting again (Fig. 2).
- During the first week, gas fluxes were analyzed, using a Gasmet DX4040 FTIR gas analyzer (data not shown). Afterwards, we extracted air samples from mesocosms and sampled 3 times in a 20 min period (samples analyzed using a Varian CP-3800 GC.).
- Fluxes were calculated using HMR package in R which allows for linear and non-linear regression analysis (Pedersen 2013).


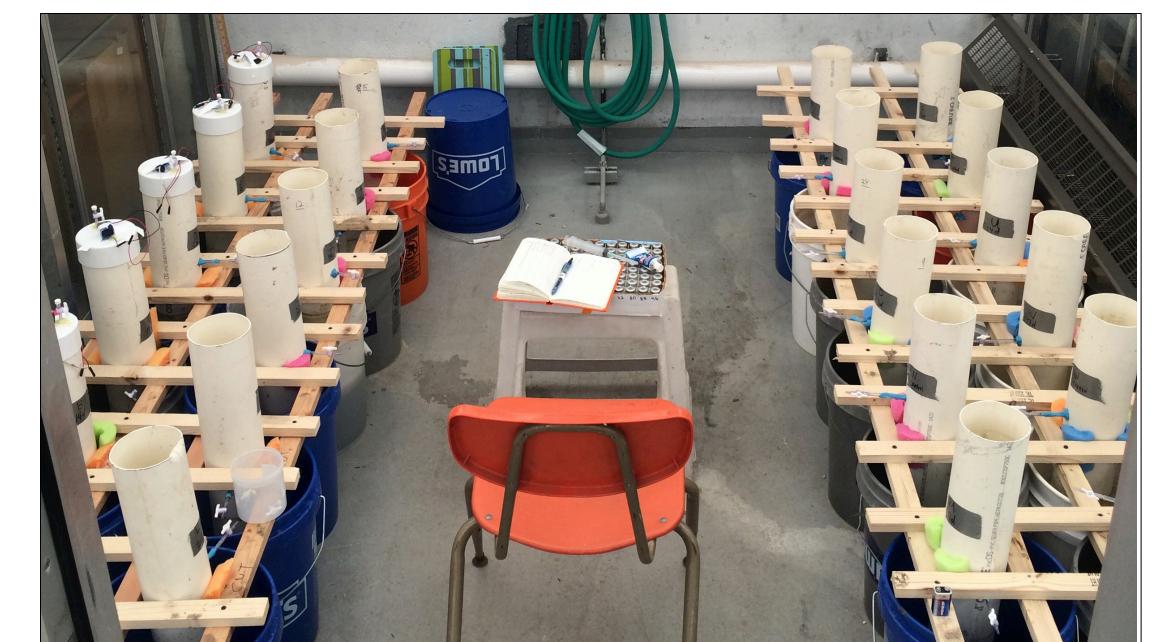


Figure 2. Experimental set up inside the greenhouse of the 24 wetland mesocosms.

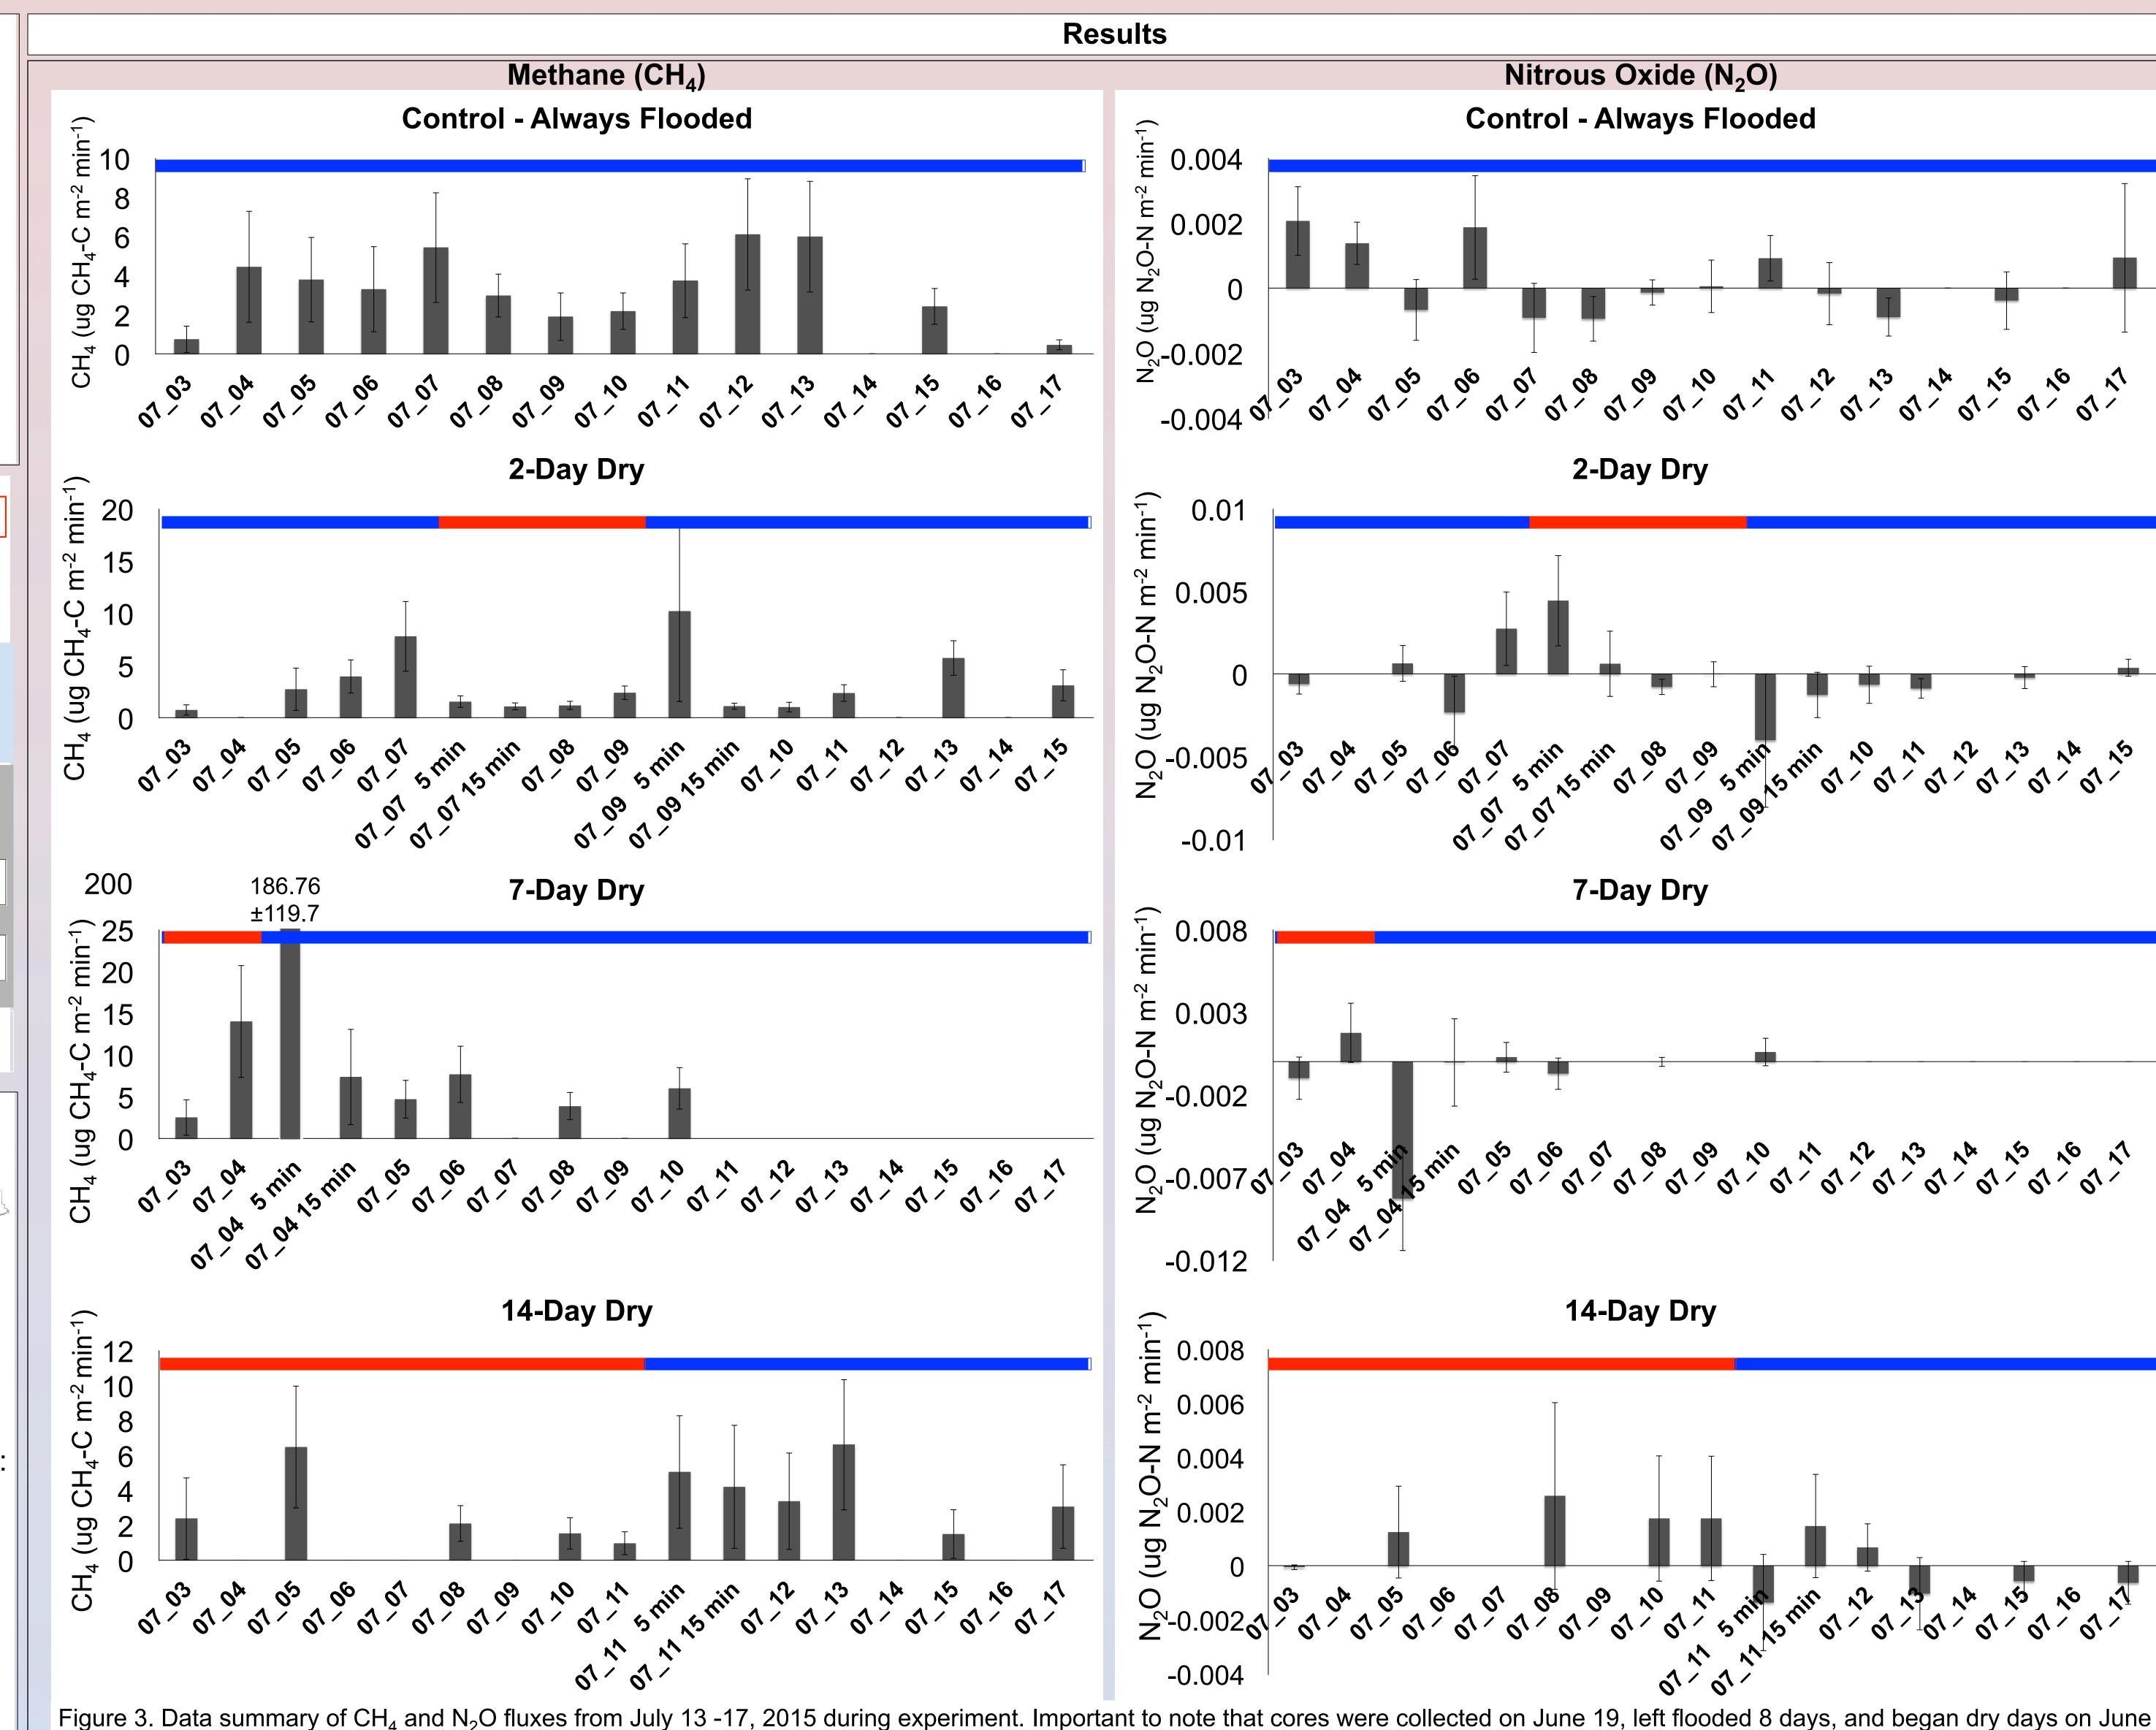

Preliminary Data Summary (Fig. 3)

- CH₄ fluxes were always positive in control and all treatment mesocosms, however, N₂O fluxes were more variable in all mesocosms.
- CH₄ fluxes were consistently higher during the wet days of all treatments. Additionally, compared to the fluxes in the dry periods, CH₄ fluxes were much higher in the first 20 minutes immediately after the rewetting events.

27. Dry days and wet days are depicted as red and blue respectively above flux data.

- Preliminary observations reveal that mostly all N₂O fluxes were positive during the dry periods. However, N₂O fluxes shift to negative fluxes in all treatments immediately after the rewetting event.
- Water chemistry data (NO₃, NO₂, NH₄) as well as soil properties will be integrated to this data in a forthcoming analysis.

Conclusions

- Our results emphasize the need to develop new and more feasible methods to better resolve the role of hydrologic regimes in the in the biogeochemical cycling of methane (CH₄) and nitrous oxide (N₂O) fluxes as an important component of closing the gap in the greenhouse gas fluxes from constructed wetland ecosystems.
- Due to the increased development of CW worldwide, it is important not just to study their effectiveness in purifying water but also the design and management decisions that control GHG fluxes.

We thank Dr. Hinsby Cadillo-Quiroz, Analissa Sarno and Steffen Buessecker for help with experimental design and Gasmet; Chris Sanchez, Antoine Massicot, Thomas Corlouer, Decker Paul, and Albern Tan for their help collecting soil cores. Research has been supported by NSF GRFP, CAP LTER Program Graduate Grant & SoLS FIGG Grant.